


We Pioneered NICE Integrated Solutions for Elevators  
**>2,000,000** Installations Worldwide

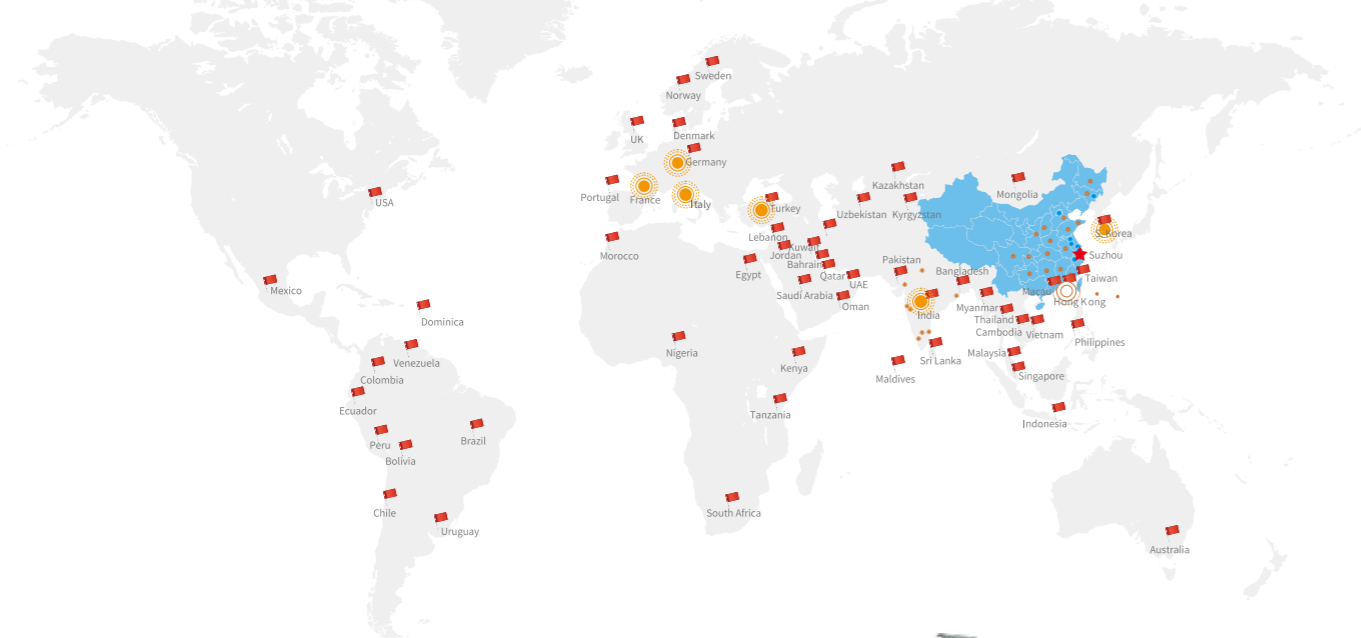

## INOVANCE

Forward, Always Progressing

### International Offices

📍 **Hong Kong SAR (export office)**  
 Tel: +852 2751 6080  
 info@inova-automation.com

📍 **South Korea-Seoul**  
 Tel: +82 (0) 10 7428 5732  
 info@inova-automation.com

📍 **India**  
 Head Office Chennai  
 Tel: +91 (0) 44 4380 0201  
 Ahmedabad  
 Tel: +91 (0) 79 4003 4274  
 Mumbai Tel: +91 (0) 22 4971 5883  
 Delhi Tel: +91 (0) 11 4165 4524  
 Sales Network in Kolkata, Bengaluru,  
 Coimbatore, Hyderabad, Pune  
 info.inovaindia@inova-automation.com

📍 **Germany-Stuttgart**  
 Tel: +49 (0) 7144 8990  
 sales@powerautomation.com  
 www.powerautomation.com

📍 **Italy-Milano**  
 Tel: +39 (0) 2268 22318  
 info@inova-automation.it

📍 **France-Bordeaux**  
 Tel: +33 (0) 5594 01050  
 pa.france@powerautomation.com

📍 **Turkey-Istanbul**  
 Tel: +90 (0) 21 6706 1789  
 info.turkey@inova-automation.com

### Inovance Technology Companies

Shenzhen Inovance Technology Co. Ltd.  
 Suzhou Inovance Technology Co. Ltd.  
 Suzhou Monarch Control Technology Co. Ltd.  
 Shanghai BST Electric Co. Ltd.



Inovance Technology  
[www.inovance.com](http://www.inovance.com)

## MD380L Series

## Open loop AC elevator drive





# Open loop AC elevator drive


## Application Features

- Smooth ride performance
- Integrated brake control
- UPS/ARD (sine & quasi square type) rescue light load direction sensing
- 5 independent S-Ramps
- Easy setup with default factory setting, gets you started quickly
- Programmable DC injection braking

Enhanced reliability with conformal coating, protects against humidity and dust pollution

Operation in high ambient temperatures  $45^{\circ}\text{C}_{\text{avg}}$

Wide operating voltage range 323 to 528 Vac



Cooling fan removable for easy maintenance

Optional: hot pluggable remote keypad



With/without memory

3.7 kW~15 kW

## Drive Key Features

- Automatic torque boost
- Slip compensation
- Flexible programmable I/O's
- Onboard Modbus-RTU
- Comprehensive trip diagnostics
- Built-in dynamic braking unit
- Output frequency 0.00~100.00 Hz




## General Specifications

Drive Model		MD380L-T3.7GB	MD380L-T5.5GB	MD380L-T7.5GB	MD380L-T11GB	MD380L-T15GB	
Dimensions	Height [mm]	248			322		
	Width [mm]	160			208		
	Depth [mm]	183			192		
Drive Input	Rated Input Voltage	3-phase 380 to 480 Vac, -15% to +10% (323 to 528 Vac)					
	Rated Input Current [A]	10.5	14.6	20.5	26	35	
	Rated Input Frequency	50/60 Hz, $\pm 5\%$ (47.5 to 63 Hz)					
Drive Output	Applicable Motor	[kW]	3.7	5.5	7.5	11	15
		[HP]	5	7.5	10	15	20
	Output Current [A]*2		9	13	17	25	32
	Power Capacity [kVA]		5.9	8.9	11	17	21
	Overload Capacity		150% for 60 Sec & 180% for 3 Sec				
Braking Resistor	Recommended Power [W]	750	1,200	1,500	2,500	3,000	
	Recommended Resistance [ $\Omega$ ]	$\geq 130$	$\geq 90$	$\geq 65$	$\geq 43$	$\geq 32$	
	Enclosure	IP20					

\*2 Carrier switching frequency 4 kHz at rated output current  
Please note: all units are fan cooled

## General Connection Diagram

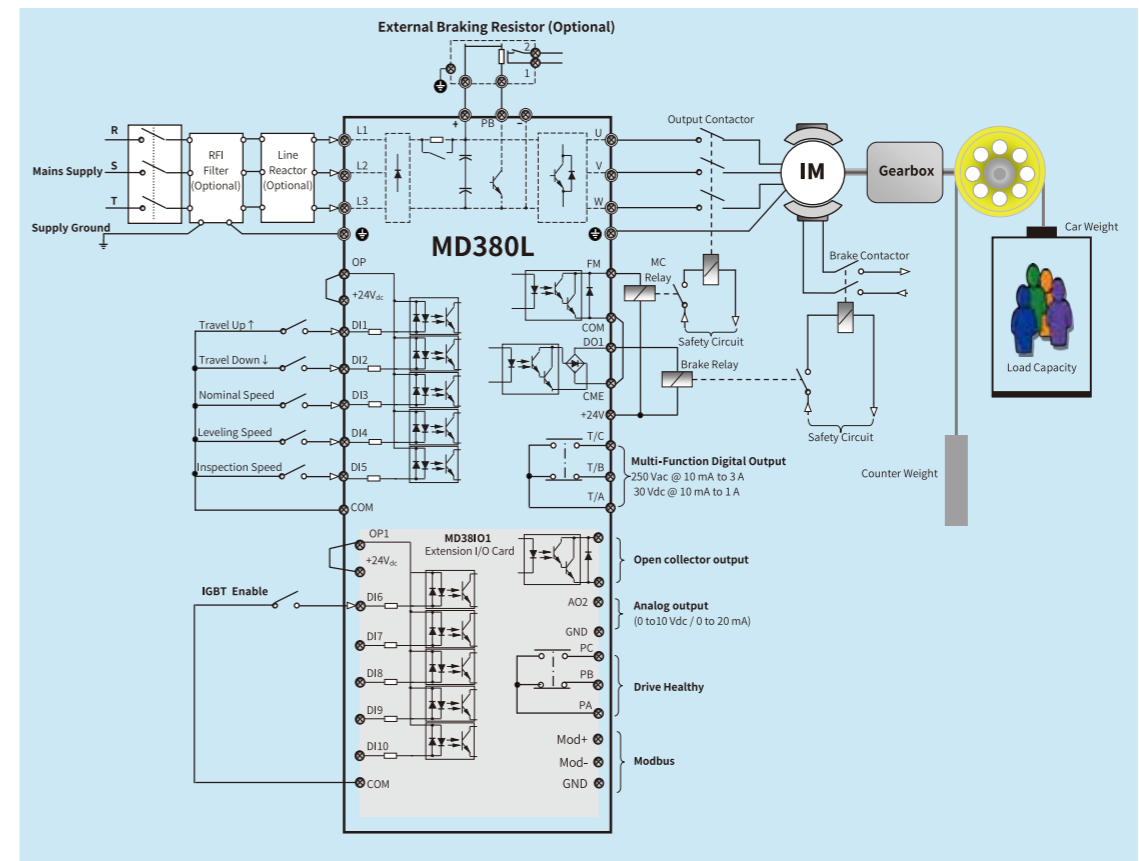

\*1 PC-Tools software offers simplified start up & backup



\*1 Compatible with Windows 7